



Products: Rain Gate

Code: DDRG99



Collects rainwater from your downspout for use around the home

Product Description

Rain Gate downspout diverter is a simple way of redirecting the water collected from your roof to any area of your garden or lawn, by simply attaching the appropriate hose to the diverter outlet. It can be used to top up your pool or fill your rainwater tank/cistern or rain barrel.

In heavier downfalls, an overflow system will direct the excess water through to the stormwater drain.

To shut-off the diversion, simply remove your hose and replace end caps, water will then flow through the overflow down the downspout to the stormwater drain.

Features and Benefits

- The easy way to collect water from your downspout
- Multi fit downspout diverter that incorporates a mosquito screen
- Body swivels for convenient hose or pipe outlet positioning
- Easy installation
- Fits a wide range of hoses
 - standard garden, 1" sump and 1½" pool, plus 3" pipe
- Can be used with rain barrels or rainwater tanks/cisterns

Installation & Maintenance


1. Remove 13½" of downspout from where the Rain Gate is to be situated. Ensure all edges are clean and smooth.
2. Using snips remove a section of the top cap to fit the downspout.
3. Fit the correct downspout adaptor to the bottom of the Rain Gate.
4. Install the Rain Gate by sliding the unit up underneath the top section of downspout and then down into position until the downspout adaptor sits firmly in place on the bottom.

SIMPLE OPERATION

- 1 Water flows down your downspout into the Rain Gate.
- 2 To turn on the diverter, remove an end cap from the Rain Gate and fit your hose to use the diverted flow. To turn off the diverter, remove your hose and replace the end caps. Water will then flow through the overflow down your downspout and into the stormwater drain.

TROUBLE-FREE MAINTENANCE

- 3 To clean the valve, remove the Rain Gate from the wall by sliding it up the downspout then downwards and outwards. Remove the downspout adaptor from the bottom of the Rain Gate to expose the valve. The valve can then be removed with a firm pull. To clean simply brush or hose off.
- 4 To re-install push the valve back into the body with a firm vertical push. It will snap into place when installed correctly.
- 5 The outlet also has an internal mosquito barrier. To clean, simply remove the outlet and mosquito barrier, hose off, then replace.

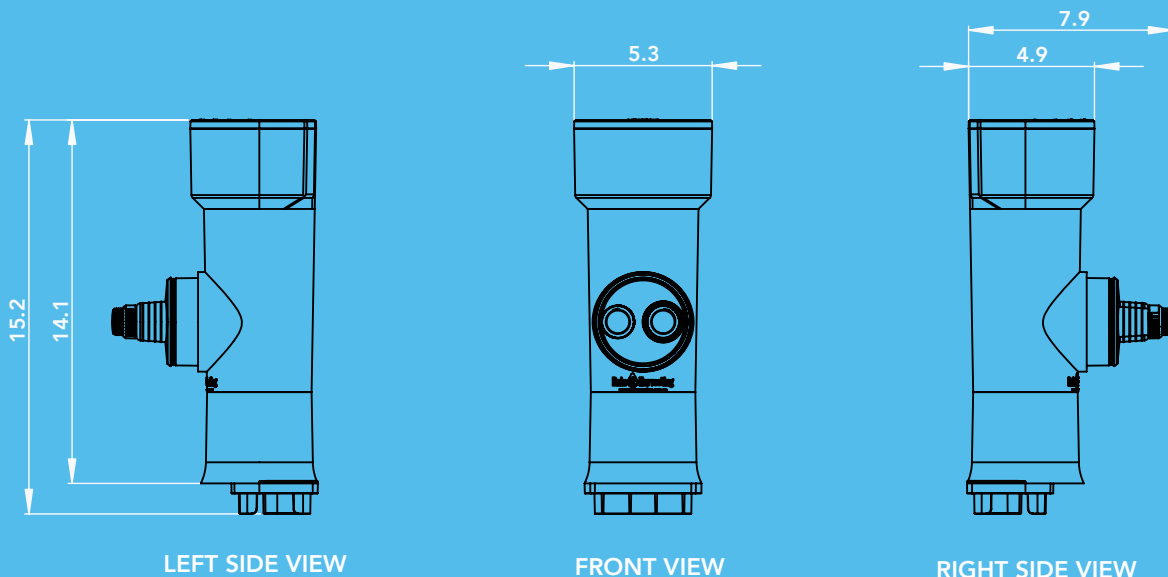

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE STATED.

DISCLAIMER This product specification is not a complete guide to product usage. Further information is available from Rain Harvesting Pty Ltd and from the Installation and Operating Instructions. This specification sheet must be read in conjunction with the Installation and Operating Instructions and all applicable statutory requirement. Product specifications may change without notice. © Rain Harvesting Pty Ltd